


**THIS EXAMPLE IS FOR  
INSTRUCTIONS NUMBER 2**

**EVERY IMPORTANT READ IT  
BEFORE SET-UP**

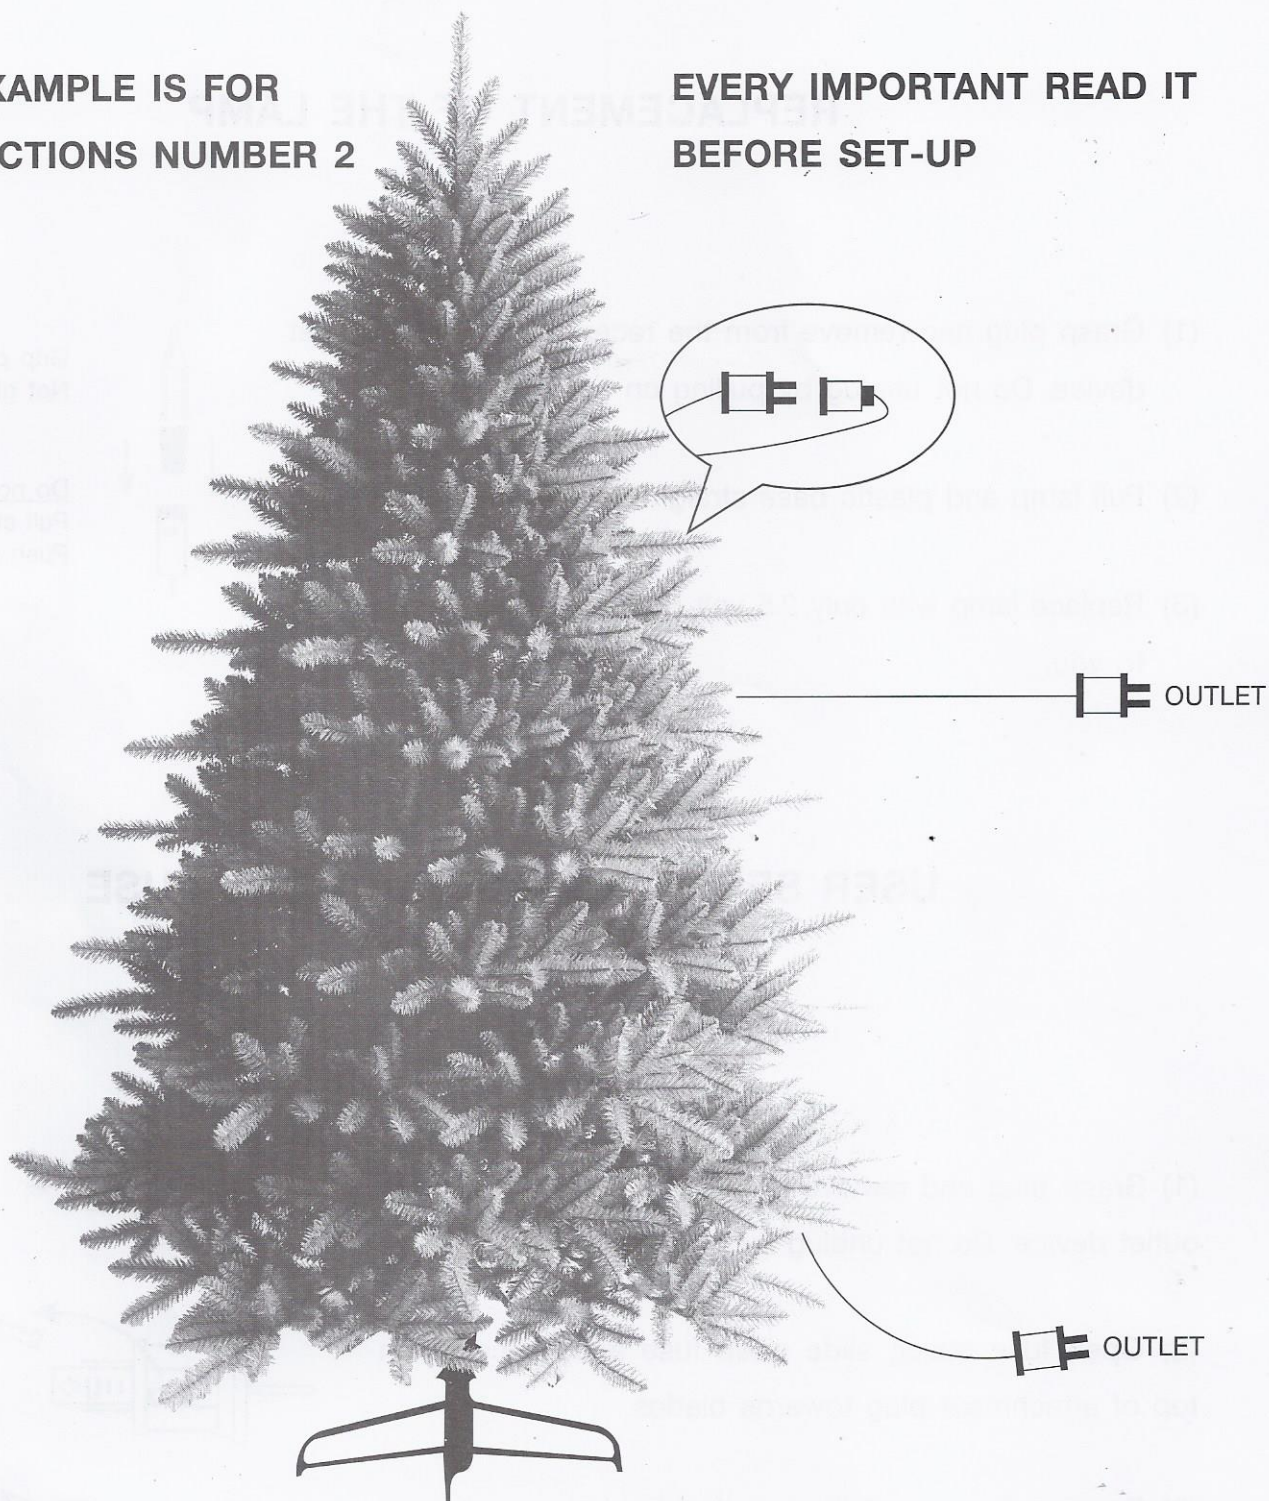

### **TO CONNECT TO POWER SOURCE**


First, Pls. Connect the top section plug with the next section plug. And then reading the following instructions carefully.

1. If the lighted tree lights are not exceeded 500 bulbs (including), connect plug with red label into electrical outlet.
2. If the lighted tree lights are over 500 bulbs and not exceeded 1000 bulbs, connect two plugs with red labels into two separate electrical outlets.
3. If the lighted tree lights are over 1000 bulbs, connect three plugs with red labels into three separate electrical outlets.

Electrical strips are recommended.

## REPLACEMENT OF THE LAMP

- (1) Grasp plug and remove from the receptacle or other outlet device. Do not unplug by pulling on cord.
- (2) Pull lamp and plastic base straight out of lampholder.
- (3) Replace lamp with only 2.5 volt bulb-sole have been provided to you.





Grip plastic  
Not glass


Do not twist lamp  
Pull straight out  
Push straight in!!

## USER SERVICING INSTRUCTIONS FUSE REPLACEMENT

- (1) Grasp plug and remove from the receptacle or other outlet device. Do not unplug by pulling on cord.
- (2) Open fuse cover, slide open fuse access cover on top of attachment plug towards blades.
- (3) Remove fuse carefully, turn fuseholder over remove fuse.
- (4) Risk of fire. Replace fuse only with 3 Amp. 125 Volt fuse (provided with product-spare included).
- (5) Close fuse cover. Slide closed fuse access cover on top of attachment plug. Do not replace attachment plug. Contains a safety device (fuse) that should not be removed. Discard product if the attachment plug is damaged.



Burned fuse



New fuse

